



- Ice towers demand a dedicated power pack for best performance.
- Digital thermostat for accurate glycol bath temperature.
- Compact dimensions for placement under the bar and near tower.
- Low noise, quiet running performance.



MMPP4300-ICE



Feature

CE Declaration of Conformity.

Specifications

Micro Matic reserves the right to change specifications without notice.




Part No.	Description	Shipping Weight	Box Dimensions
<input type="checkbox"/> MMPP4300-ICE	Air Cooled	43 kg	762mm L x 584mm W x 381mm H
		93 lbs	30"L x 23"W x 15"H

Operating Performance

Compressor	1/6 HP
BTU per hour	1,172
Plug Type (NEMA #)	5-15P
Voltage	115
Running	250W
Refrigerant	R-134a
Charge	TBD
Bath Capacity	13 litre (3.5 Gallons)
Pump Type	Vertical
Inlet Barb:	9.52mm (3/8")
Outlet Barb:	9.52mm (3/8")

Dimensions

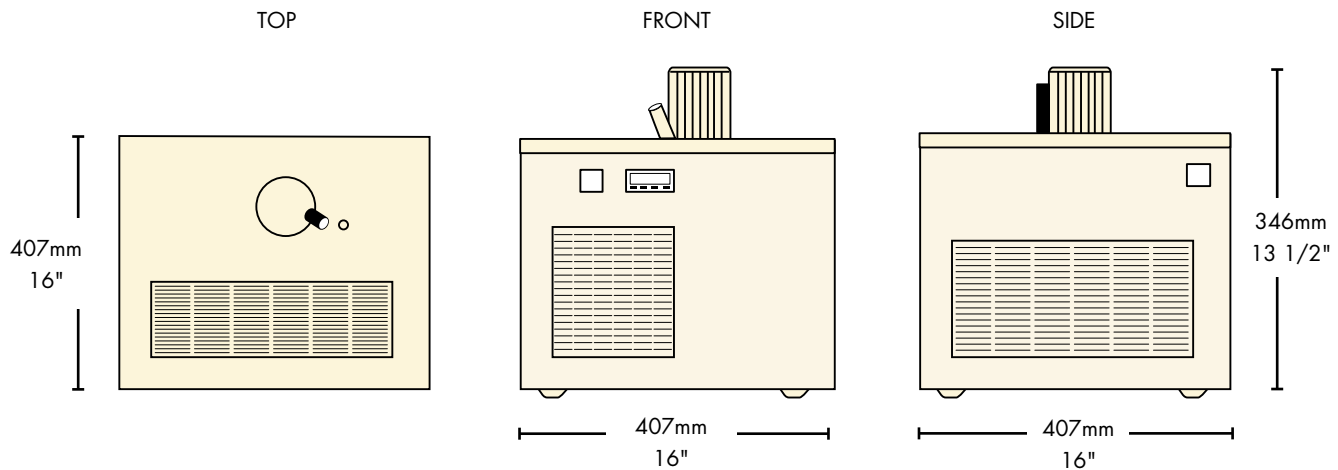

Note: Power pack intended only for the ice/frosting of flooded tower - not for beer line cooling from keg.

Copyright ©2009 Micro Matic USA, Inc. All Rights Reserved.

000701-D0909



www.micromatic.com

Toll Free: 1-(866) 327-4159

West	Central	Southeast	Northeast
19791 Bahama Street Northridge, CA 91324 Tel. (818) 701-9765 Fax. (818) 701-9844	10726 North Second Street Machesney Park, IL 61115 Tel. (815) 968-7557 Fax. (815) 968-0363	2364 Turbine Court Brooksville, FL 34604 Tel. (352) 799-6331 Fax. (352) 796-2429	4601 Saucon Creek Road Center Valley, PA 18034 Tel. (610) 625-4464 Fax. (610) 625-4466