



- On-site accurate blending of CO2 and Nitrogen gases.
- Save money by not purchasing expensive premixed cylinders.
- Save labor by not changing cylinders.
- Increase profits by serving a consistent perfect pint.



MM300

Specifications


Micro Matic reserves the right to change specifications without notice.

Part No.	Description	Shipping Weight	Box Dimensions
<input type="checkbox"/> MM300	Ales/Lagers: 70% CO2/30% N2	4 kg	406mm L x 305mm W x 229mm H
	Ales/Lagers: 60% CO2/40% N2	8 lbs	16"L x 12"W x 9"H
	Stouts: 25% CO2/75% N2		16"L x 12"W x 9"H

Performance

Inlet Barb:	9.52mm (3/8")
Outlet Barb:	9.52mm (3/8")
Outlet Pressure:	Factory preset at 3.45 bar (50 psi), non-adjustable
Accuracy and Flow Range:	2% of full scale or better within the flow range of .4 to 40 liters per minute (.85 to 85 cubic feet per hour.)

Dimensions

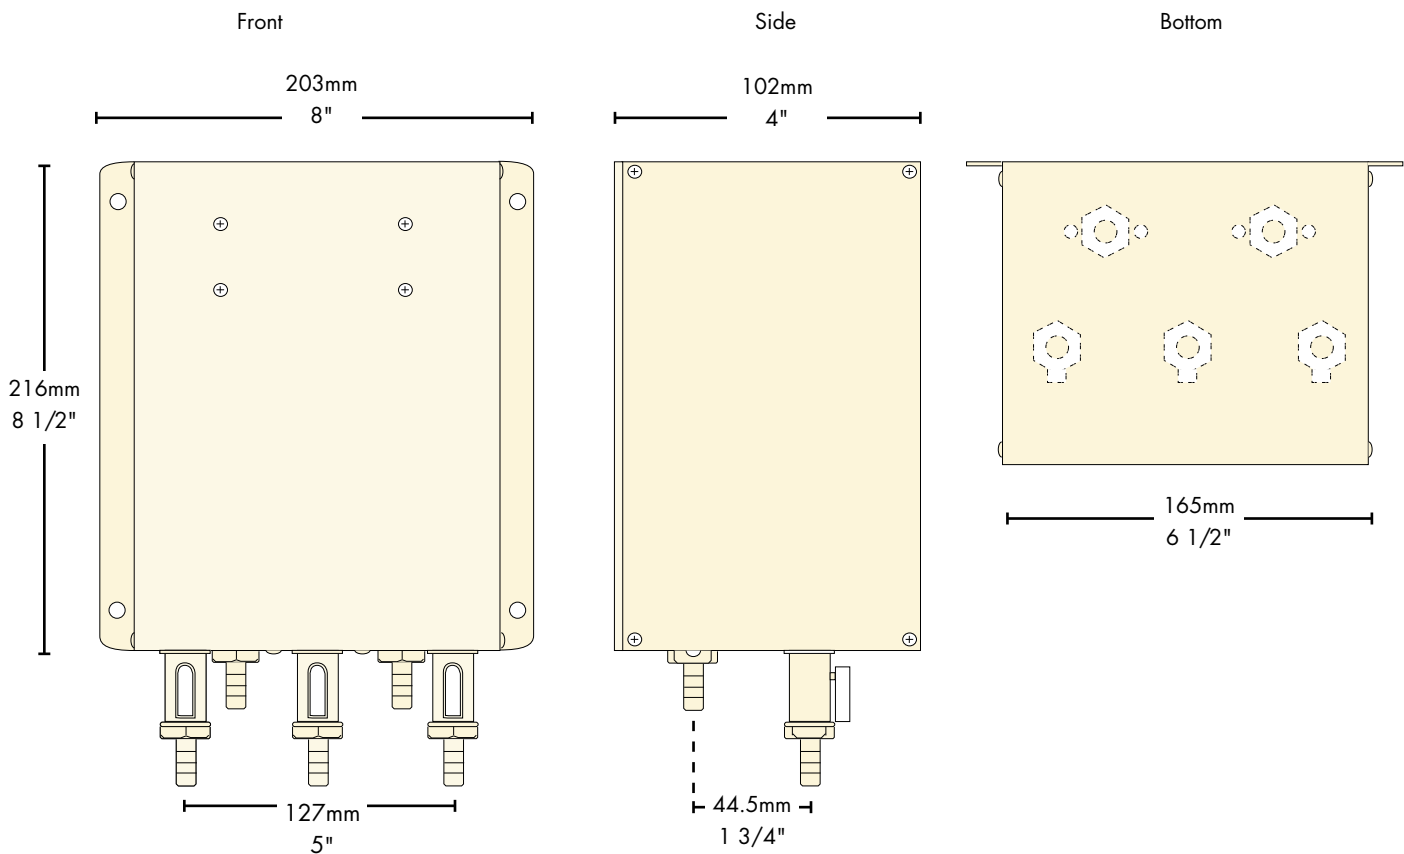

Copyright ©2012 Micro Matic USA, Inc. All Rights Reserved.

01214D0312

