

- Dependable delivery of cold beer from walk-in to tower.
- Black Diamond is 15% more thermally efficient than traditional tape jacket.
- Brewery Approved tubing.
- Color coded lines for easy identification.



Features



Standard 51 Listed
Food Equipment Materials

Specifications

Micro Matic reserves the right to change specifications without notice.


AUTOQUOTES

Part No.	Description	Shipping Weight	Box Dimensions
<input type="checkbox"/> CDI632	6 Product Lines/2 Glycol Lines	.27 kg (per 305mm)	TBD
		.60 lbs (per foot)	TBD

Performance

Product Lines	9.5mm I.D. (3/8" I.D.) Brewery Approved Brewmaster II Barrier Tubing
Glycol Cooling Lines	9.5mm I.D. x 12.7mm O.D. (3/8" I.D. x 1/2" O.D.) Polyethylene Tubing
	Outgoing: Blue Color Coded
	Return: Red Color Coded
Moisture Barrier Wrap	Food Quality Barrier Film
Cold Transfer Wrap	Aluminum Foil
Insulation	19mm (3/4") Closed Cell
Black Diamond® Jacket	15% more thermally efficient than tape. Braiding reinforced, resistant to tearing
Exterior Marks	Sequential Foot Marking, Every 610mm (2 Feet)
Fire Rating	Class 1 - Self extinguishing to BS3924, Class 1 when applied to insulation.
Certification	NSF/ANSI Standard 51 Food Equipment Materials.

Dimensions

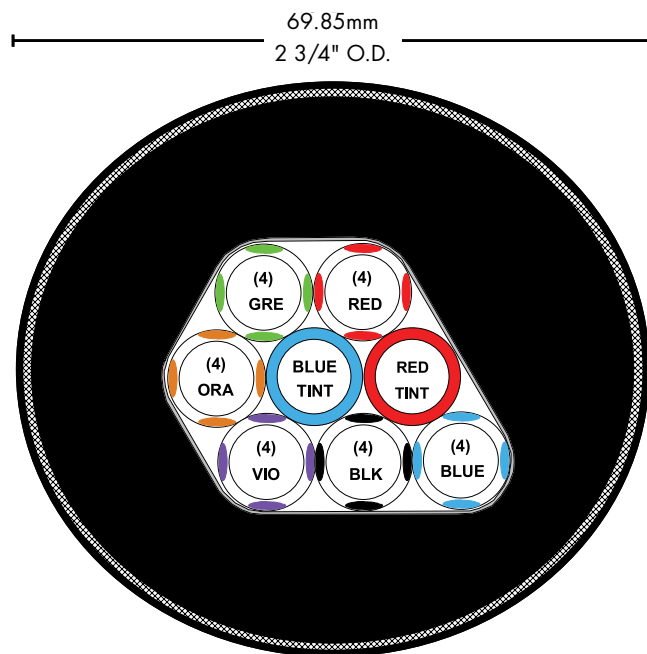

Copyright ©2012 Micro Matic USA, Inc. All Rights Reserved.

00013.D0312



MICRO MATIC

www.micromatic.com

Toll Free: 1-(866) 327-4159

West

19791 Bahama Street
Northridge, CA 91324
Tel. (818) 701-9765
Fax. (818) 701-9844

Central

10726 North Second Street
Machesney Park, IL 61115
Tel. (815) 968-7557
Fax. (815) 968-0363

Southeast

2364 Simon Court
Brooksville, FL 34604
Tel. (352) 799-6331
Fax. (352) 796-2429

Northeast

4601 Saucon Creek Road
Center Valley, PA 18034
Tel. (610) 625-4464
Fax. (610) 625-4466