

- Designed by beer-industry experts for performance and value.
- Integrated glass rinser: condition the glass with cold water before pouring.
- Rugged keg slides – extends floor life.
- Full-size drain tray – larger work area and improved hygiene.



▶ Integrated cold water glass rinser.



Black with Glass Rinser

MDD23-GR



Stainless Steel with Glass Rinser

MDD23S-GR

Feature



Listed by Edison Testing Laboratories.
Conforms to UL & NSF Standards.

Specifications

Micro Matic reserves the right to change specifications without notice.


Part No.	Exterior Finish	Doors	Shipping Weight	Box Dimensions
☐ MDD23-GR	Black With Glass Rinser	1	78 kg	679mm L x 794mm W x 1194mm H
			171 lbs	26 3/4"L x 31 1/4"W x 47"H
☐ MDD23S-GR	Stainless Steel With Glass Rinser	1	78 kg	679mm L x 794mm W x 1194mm H
			171 lbs	26 3/4"L x 31 1/4"W x 47"H

Operating Performance

Capacity of 1/2 Kegs	1	Running Amps	2.7
Cubic Feet (liters)	8.4 (239)	Voltage	115/60/1
Number of Draft Towers	1	Plug Type	NEMA-5-15P
Number of Faucets	1	Cord Length	8'
Beer Tower Approval	NSF 7.0 and NSF 18	Refrigerant	R-134a
Approval	ETL Listed	Charge oz (Grs)	10.5 (300)
Condenser HP	1/6		

Exterior	All Models: 18 gauge stainless steel top, 22 gauge solid doors, 24 gauge steel front, sides and back. Black Vinyl Models: Front, sides. Stainless Steel Models: Front, sides.
Interior	20 gauge stainless steel floor, reinforced frame, 24 gauge galvanized walls
Ventilation	Back ventilated
Plumbing	Drain Tray: 3/4" NPT drain exits out left end. Automatic condensate evaporator, no drain connection required. Evaporator condensate has been plumbed to a condensate pan located in the compressor housing.
Insulation	Foamed-in-place using high density, CFC-free polyurethane; 1-1/2" top, walls and floor.
Castors - Standard	
Glass Rinser	15 - 20 PSI Water Connection

Dimensions

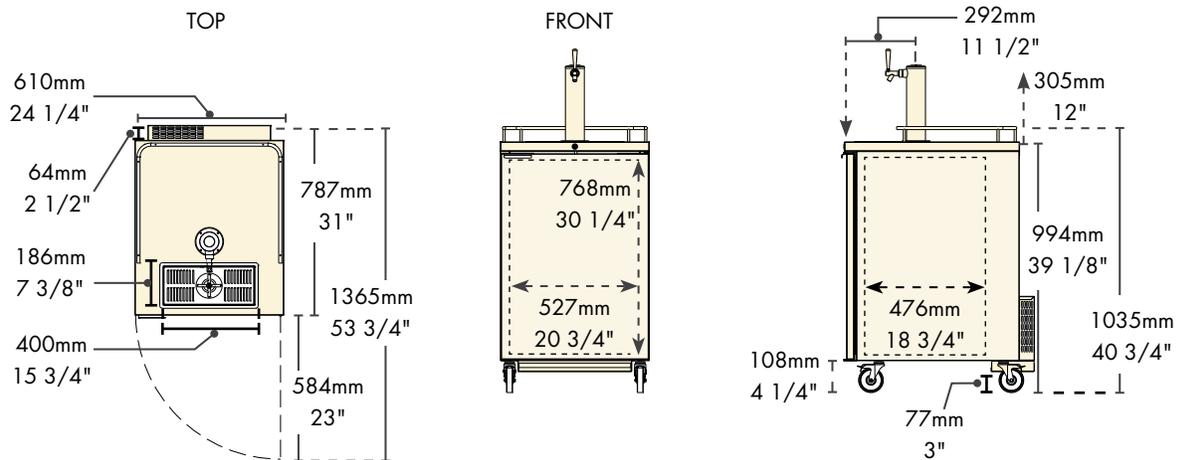

Copyright ©2012 Micro Matic USA, Inc. All Rights Reserved. 00463.D0812

