



- Designed specifically for Metropolis T draft towers.
 - Add European style while creating dispense excitement.
 - Condition the glass before pouring – invert glass, push down on sprayer for cold water rinsing.
 - Robust 18 gauge stainless steel construction.
-

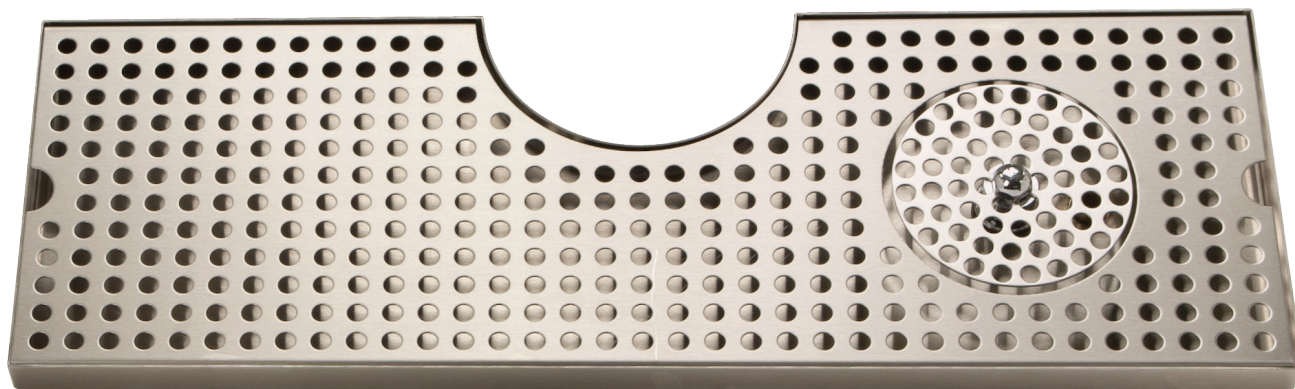

Stainless Steel
DP-MET-T-24GR

Features

-  Stainless Steel for improved hygiene and durability.

Specifications

Part No.	Description	Faucets	Shipping Weight	Box Dimensions
<input type="checkbox"/> DP-MET-T-24GR	Stainless Steel	4 – 8	3 kg	641mm L x 210mm W x 51mm H
			7 lbs	25 1/4" L x 8 1/4" W x 2" H

Rinser Water Inlet Installation

- Always check local plumbing codes first.
- Install in-line water regulator set at 15 PSI from the street water supply (no greater, perfect operating pressure).
- Install in-line one way check valve from the street water supply (prevents pressure drop which can cause leaking).
- Install in-line shut-off for the rinser system from the street water supply (this must be turned off nightly).
- If teed into soda system make sure system can handle the increased water demand. Have plumber install a 45° 1/2" O.D. barb for the drains if line is not hard plumbed into the system.
- Install a shut-off for the rinser water supply if line is not hard plumbed into the system.

Dimensions

