

Retrofit any U.S. style shank with this flow control faucet and adapter. Adjustments are easy and tamper-proof by using the removable Allen wrench key.



4933-FCG

### Features:

- Stainless Steel lever is more durable than brass when used with tall, heavy handles.
- Adjustable Flow Control Spout
- Longer spout helps to eliminate foam
- Traditional European style
- Faucet Knob Included
- Spring Loaded Self Closing Faucet Handle

**Note:** Faucet extends 1-7/8" further out from tower than standard beer faucet

### Specifications

<b>Type</b>	Lagers & Ales Faucet
<b>Feature</b>	Adjustable Flow Control
<b>Faucet Washer</b>	27/32" O.D. 21/32" I.D. Thickness; 3/32"
<b>Body</b>	Gold Plated Brass
<b>Body Threads</b>	1-1/8"-18 Thread (U.S. Beer Industry Standard)
<b>Lever Material</b>	303 Stainless Steel
<b>Lever Threads</b>	3/8"-16 UNC (Unified Coarse Thread)
<b>Action</b>	Self Closing, spring loaded shaf
<b>Shaft</b>	Chrome Plated Brass



## 4933-FCC & 4933-FCG

Prior to attaching the faucet to the dispense tower, please ensure the following:

**Ensure the shank adapter is in the correct position.**

Correct



Incorrect



**Ensure the washer is in place. Failure to place the washer on the shank adapter will result in a faulty seal, causing a leak.**





On most US tower shanks, the faucet will easily adapt to the shank collar.




In some cases, the shank bore will not allow enough space to accept the torpedo like faucet shank. In this case, the shank adapter needs to be placed on the tower shank first.








Once the Shank Adapter has been tightened to the shank collar, the faucet may be attached.

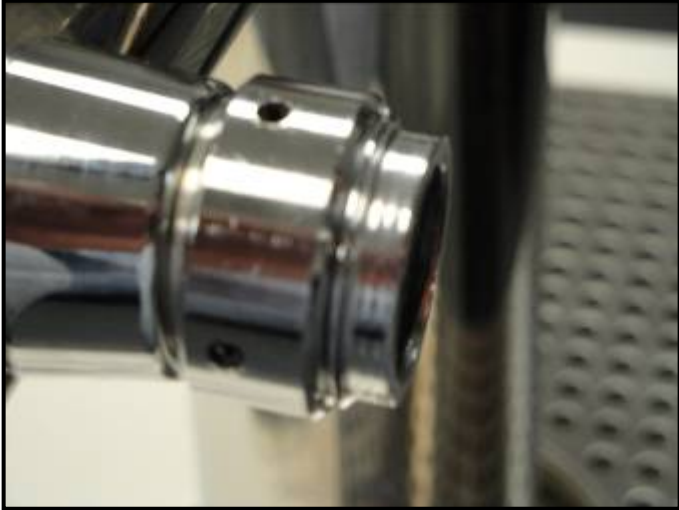

Once the Faucet has been treaded into the tower shank and adapter, adjust the collar shank in order to straighten the faucet. (Be sure to tighten the collar firmly to ensure a leak proof seal.)

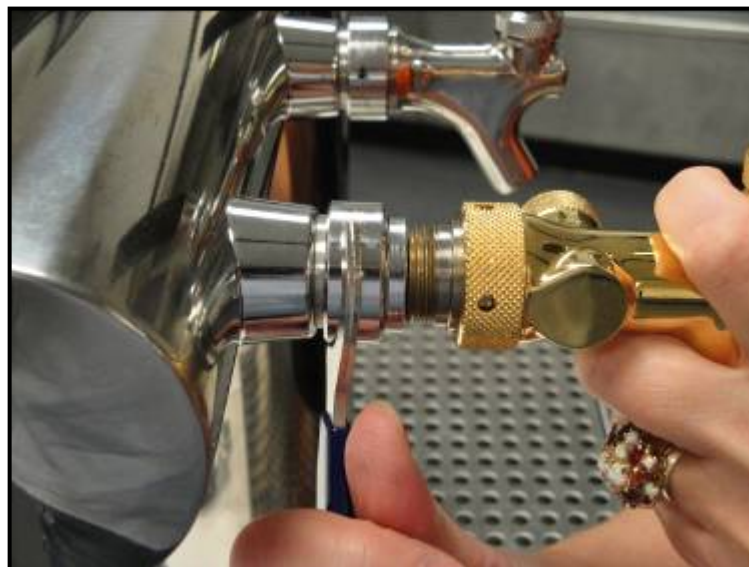

There may be instances where the faucet will not fit older dispense towers.