


- Combine with other platform trays for continuous drain area.
 - Specify two corner units to create a 90° radius.
 - Perfect choice for either a new install or retrofit a damaged bar top.
 - Robust 18 gauge stainless steel module.
-



Stainless Steel
DP-1601

Features

-  Stainless Steel for improved hygiene and durability.



Specifications

Part No.	Description	Shipping Weight	Box Dimensions
<input type="checkbox"/> DP-1601	Stainless Steel	3 Kg	457mm L 457mm W x 76mm H
		5 lbs	18"L x 18"W x 3"H

Rinser Water Inlet Installation

- Always check local plumbing codes first.
- Install in-line water regulator set at 15 PSI from the street water supply (no greater, perfect operating pressure).
- Install in-line one way check valve from the street water supply (prevents pressure drop which can cause leaking).
- Install in-line shut-off for the rinsing system from the street water supply (this must be turned off nightly).
- If teed into soda system make sure system can handle the increased water demand. Have plumber install a 45° 1/2" O.D. barb for the drains if line is not hard plumbed into the system.
- Install a shut-off for the rinsing water supply if line is not hard plumbed into the system.

Dimensions

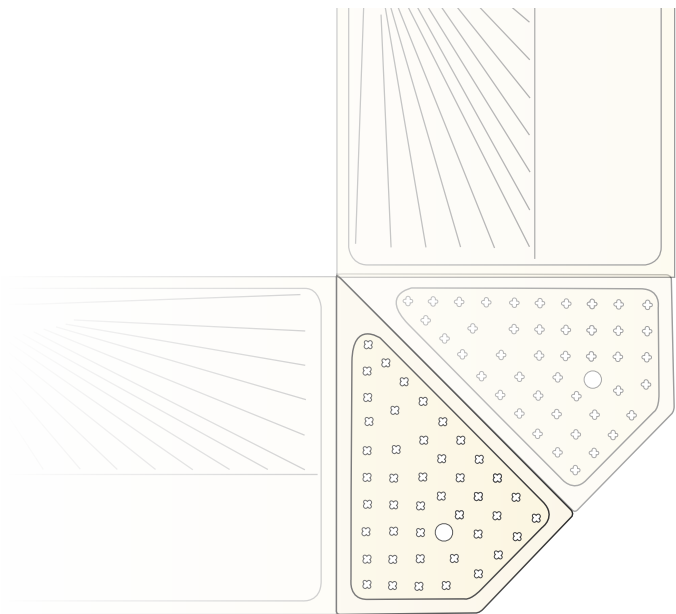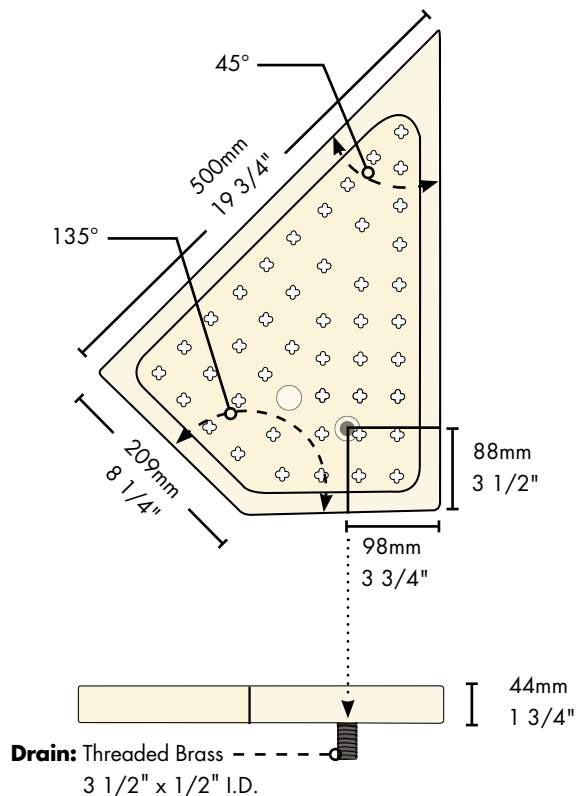

Installation Suggestion