

- On-site accurate blending of CO₂ and Nitrogen gases.
- Save money by not purchasing expensive premixed cylinders.
- Save labor by not changing cylinders.
- Increase profits by serving a consistent perfect pint.




Specifications

Part No.	Description	Shipping Weight	Box Dimensions
<input type="checkbox"/> MM200	Ales/Lagers: 70% CO2/30% N2	4 kg	406mm L x 305mm W x 229mm H
	Stouts: 25% CO2/75% N2	8 lbs	16"L x 12"W x 9"H

Performance

Inlet Barb:	9.52mm (3/8")
Outlet Barb:	9.52mm (3/8")
Outlet Pressure:	Factory preset at 3.45 bar (50 psi), non-adjustable
Accuracy and Flow Range:	2% of full scale or better within the flow range of .4 to 40 liters per minute (.85 to 85 cubic feet per hour.)

Dimensions

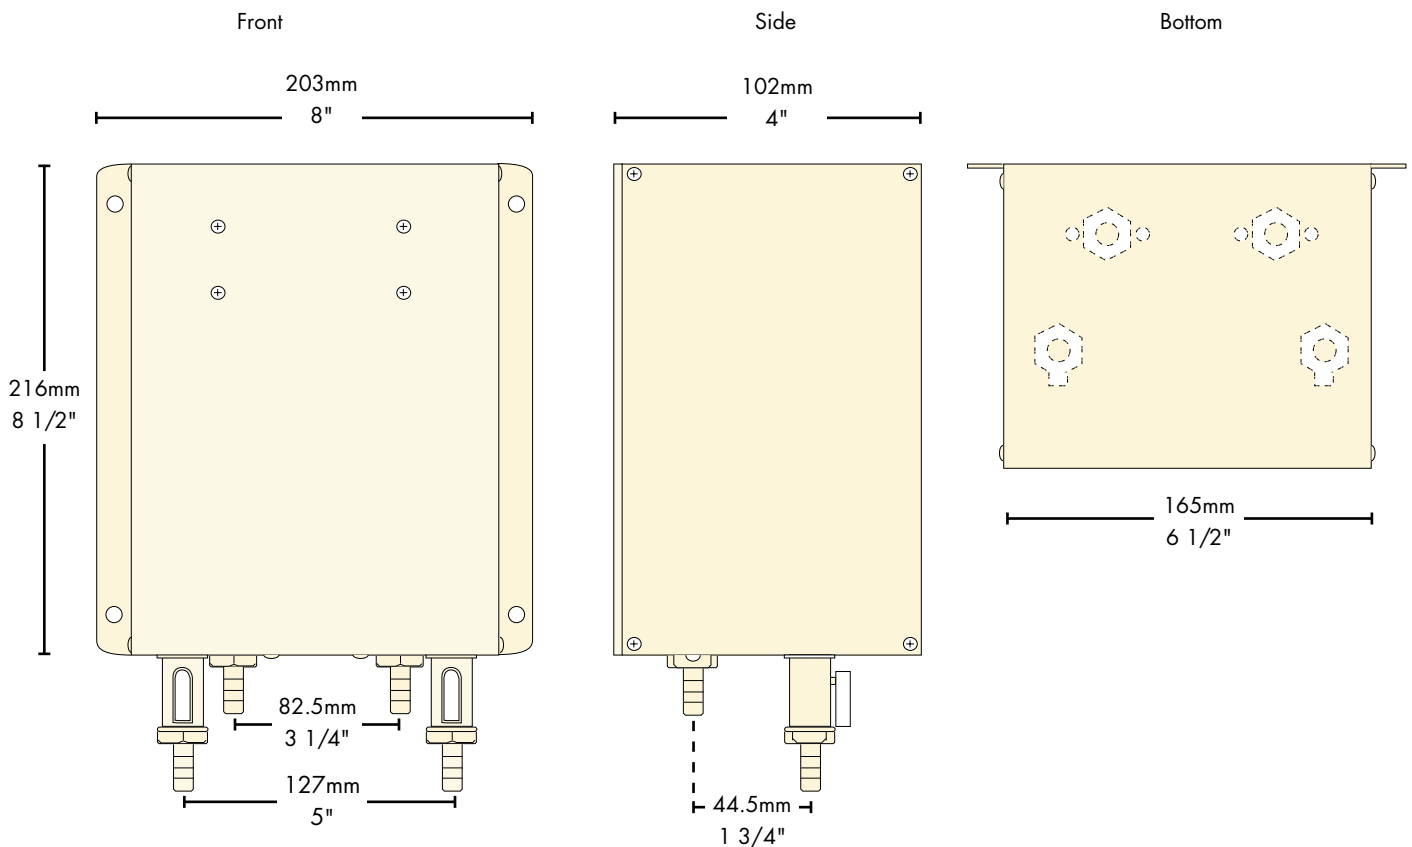

Copyright ©2012 Micro Matic USA, Inc. All Rights Reserved.

00112.D0312



www.micromatic.com

Toll Free: 1-(866) 327-4159

West	Central	Southeast	Northeast
19791 Bahama Street Northridge, CA 91324 Tel. (818) 701-9765 Fax. (818) 701-9844	10726 North Second Street Machesney Park, IL 61115 Tel. (815) 968-7557 Fax. (815) 968-0363	2364 Simon Court Brooksville, FL 34604 Tel. (352) 799-6331 Fax. (352) 796-2429	4601 Saucon Creek Road Center Valley, PA 18034 Tel. (610) 625-4464 Fax. (610) 625-4466