





SURFACE MOUNT SERIES WITH CUTOUT 8 1/2" X 24"

- Designed specifically for Metropolis T draft towers
- Add European style while creating dispense excitement
- Condition the glass before pouring - invert glass, push down on sprayer for cold water rinsing
- Robust 18 gauge stainless steel construction

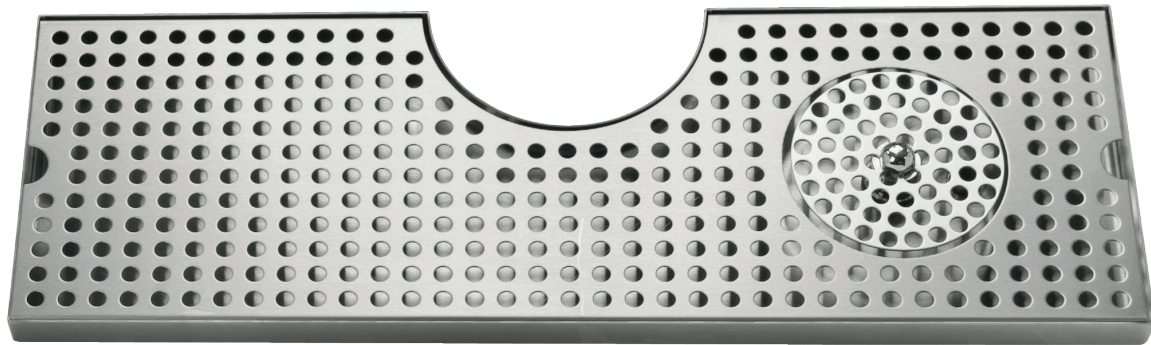

DP-MET-T-24GR-Z

Stainless Steel

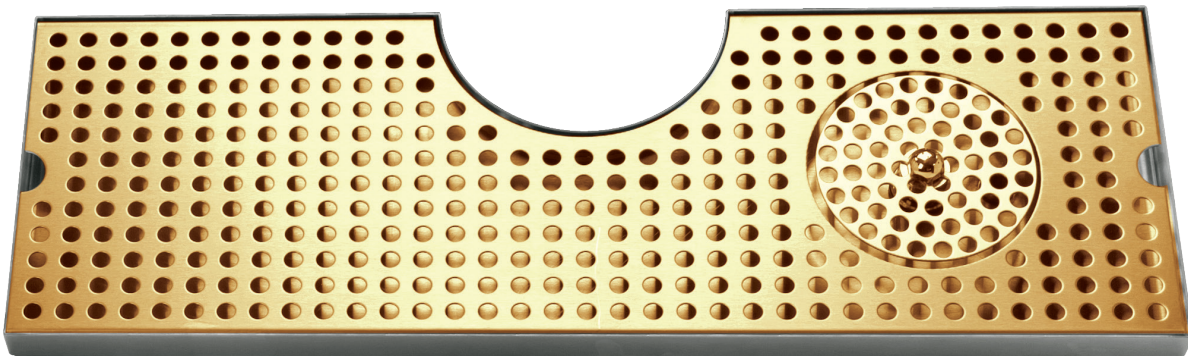

DP-MET-T-PVD-24GR-Z

PVD Brass / Stainless Steel



Part No.	Dimensions	Finish	Shipping Weight
❑ DP-MET-T-24GR-Z	8 1/2"W x 24"L x 3/4"H	Stainless Steel	TBD
			TBD
❑ DP-MET-T-PVD-24GR-Z	8 1/2"W x 24"L x 3/4"H	PVD Brass / Stainless Steel	TBD
			TBD

Rinser Water Inlet Installation

- Always check local plumbing codes first
- Install in-line water regulator set at 15 PSI from the street water supply (no greater, perfect operating pressure)
- Install in-line one way check valve from the street water supply (prevents pressure drop which can cause leaking)
- Install in-line shut off for the rinsing system from the street water supply (this must be turned off nightly)
- If teed into soda system make sure system can handle the increased water demand. Have plumber install a 45° 1/2" O.D. barb for the drains if line is not hard plumbed into the system
- Install a shut off for the rinsing water supply if line is not hard plumbed into the system

Dimensions

