




GEN-X™ TRUNKLINE

2 PRODUCT - 3/8" I.D.

- GEN-X™ barrier tubing stops gas permeation to preserve beverage aroma and flavor
- Dependable delivery of cold beer or wine from walk-in to tower
- Black Diamond® is 15% more thermally efficient than traditional tape jacket
- Color coded lines for easy identification

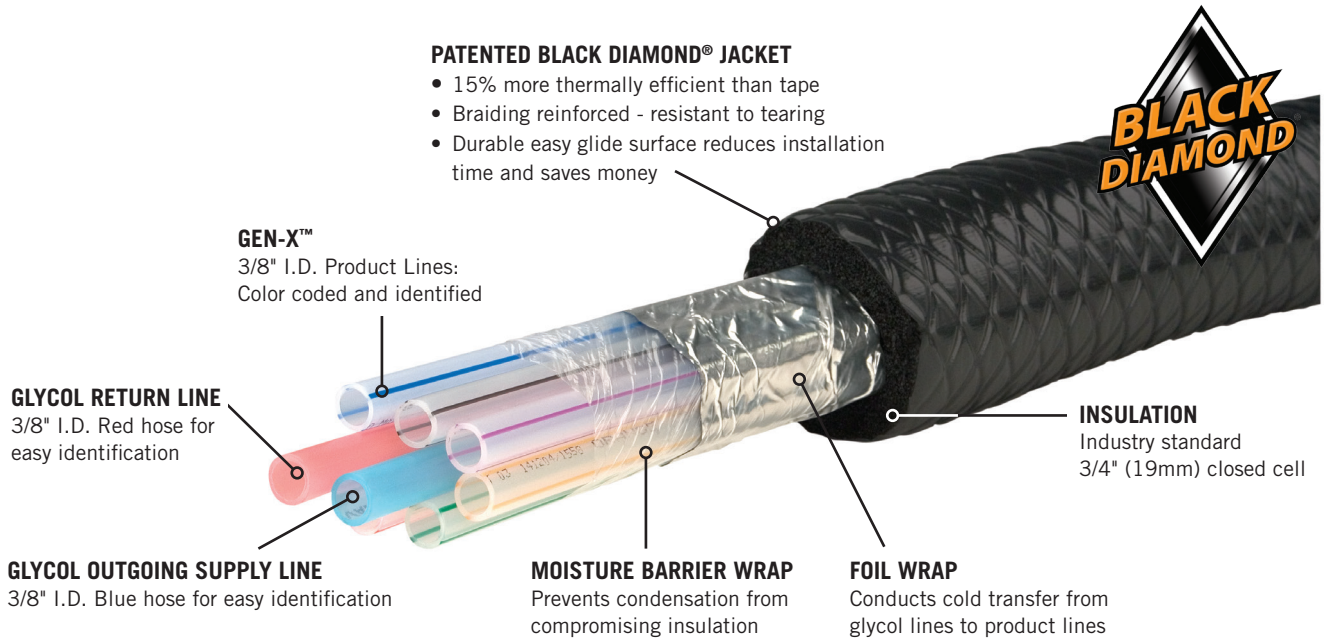

CDI232-X


NSF Standard 51 Listed Food Equipment Materials

Part No.	Description	Shipping Weight
 CDI232-X	2 Product Lines/2 Glycol Lines	.27 kg (per 305mm) .60 lbs (per foot)

Performance

Product Lines	9.5mm I.D. (3/8" I.D.) GEN-X™ Barrier Tubing
Glycol Cooling Lines	9.5mm I.D. x 12.7mm O.D. (3/8" I.D. x 1/2" O.D.) Polyethylene Tubing Outgoing: Blue Color Coded Return: Red Color Coded
Moisture Barrier Wrap	Food Quality Barrier Film
Cold Transfer Wrap	Aluminum Foil
Insulation	19mm (3/4") Closed Cell
Black Diamond® Jacket	15% more thermally efficient than tape. Braiding reinforced, resistant to tearing.
Exterior Marks	Sequential Foot Marking, Every 610mm (2 Feet)
Fire Rating	Class 1 - Self extinguishing to BS3924, Class 1 when applied to insulation.
Certification	NSF/ANSI Standard 51 Food Equipment Materials.

Dimensions

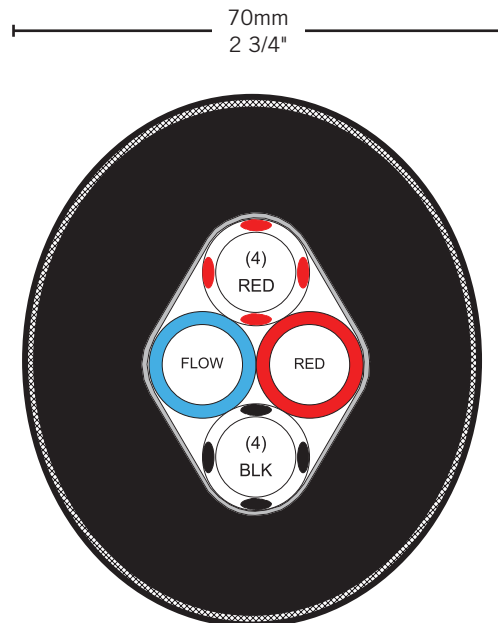

 **MICRO MATIC**
Toll-Free: 1-866-327-4159
www.micromatic.com

West
19791 Bahama St.
Northridge, CA 91324
Tel. (818) 701-9765
Fax. (818) 701-9844

Central
10726 North Second St.
Machesney Park, IL 61115
Tel. (815) 968-7557
Fax. (815) 968-0363

Southeast
15111 Dispense Ln.
Brooksville, FL 34604
Tel. (352) 799-6331
Fax. (352) 796-2429

Northeast
4601 Saucon Creek Rd.
Center Valley, PA 18034
Tel. (610) 625-4464
Fax. (610) 625-4466