


- Forged brass and die cast for durability.
- Quad-Ring inlet seal at tank connection.
- Set screw pressure adjustment.
- Flow control inlet nipple filter.

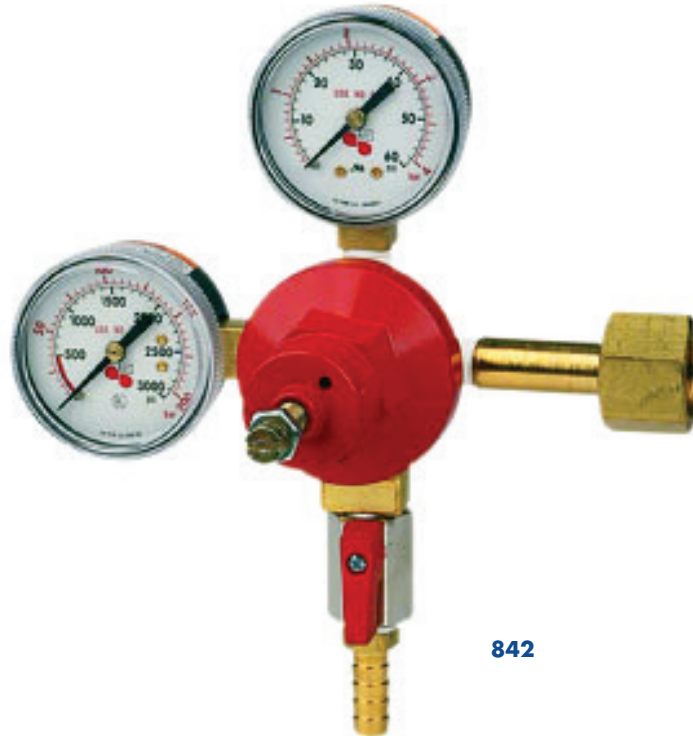

842

### Specifications

<b>Type</b>	Primary Regulator - CO <sub>2</sub>
<b>Installation</b>	PVD-plated Polished 303 Stainless Steel
<b>Performance</b>	1 Pressure / 1 Keg
<b>Output Pressure Gauge</b>	0-60 PSI, for accurate keg pressure
<b>Tank Pressure Gauge</b>	0-3000 PSI, for remaining tank pressure
<b>Capacity</b>	SCFM 3.5 Max
<b>Outlet Barb</b>	3/8" O.D. (To fit 5/16" I.D. Gas Hose)
<b>Integral PRV</b>	For safety: pressure relief valve releases at 55-65 PSI