


- GEN-X™ barrier tubing stops gas permeation to preserve beverage aroma and flavor
- Dependable delivery of cold beer or wine from walk-in to tower
- Color coded lines for easy identification

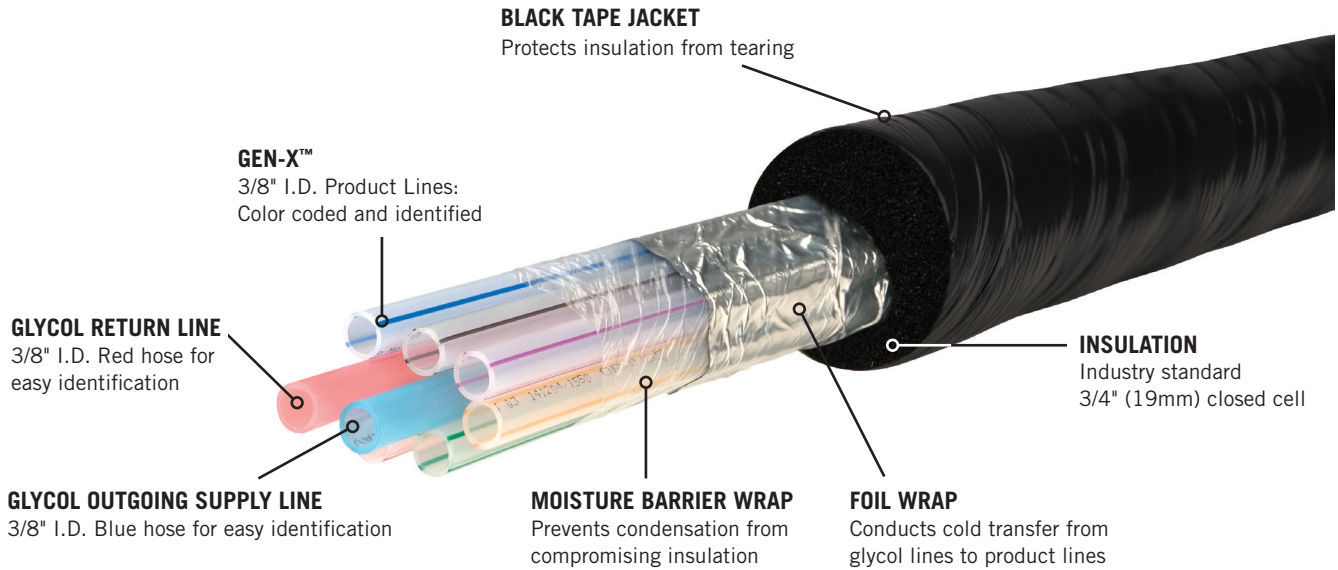


**CD11434-X**

| Part No.                           | Description                     | Shipping Weight                          |
|------------------------------------|---------------------------------|--|
| <input type="checkbox"/> CDI1434-X | 14 Product Lines/4 Glycol Lines | .27 kg (per 305mm)<br>.60 lbs (per foot) |

## Performance

|                              |   |
|------------------------------|---|
| <b>Product Lines</b>         | 9.5mm I.D. (3/8" I.D.) GEN-X™ Barrier Tubing  |
| <b>Glycol Cooling Lines</b>  | 9.5mm I.D. x 12.7mm O.D. (3/8" I.D. x 1/2" O.D.) Polyethylene Tubing<br><b>Outgoing:</b> Blue Color Coded<br><b>Return:</b> Red Color Coded |
| <b>Moisture Barrier Wrap</b> | Food Quality Barrier Film   |
| <b>Cold Transfer Wrap</b>    | Aluminum Foil   |
| <b>Insulation</b>            | 19mm (3/4") Closed Cell   |
| <b>Black Tape Jacket</b>     | Resistant to tearing.   |
| <b>Exterior Marks</b>        | Sequential Foot Marking, Every 610mm (2 Feet)   |
| <b>Fire Rating</b>           | Class 1 - Self extinguishing to BS3924, Class 1 when applied to insulation.   |
| <b>Certification</b>         | NSF/ANSI Standard 51 Food Equipment Materials.  |

## Dimensions

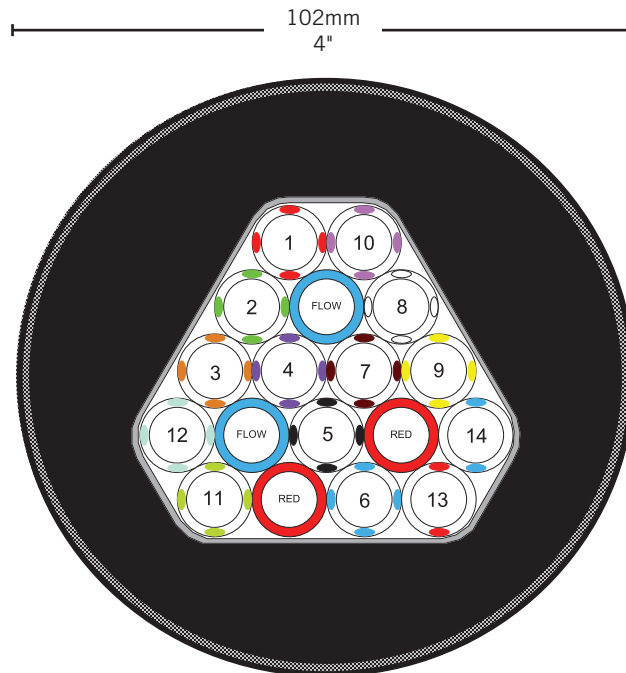

 **MICRO MATIC**  
Toll-Free: 1-866-327-4159  
[www.micromatic.com](http://www.micromatic.com)

**West**  
19791 Bahama St.  
Northridge, CA 91324  
Tel. (818) 701-9765  
Fax. (818) 701-9844

**Central**  
10726 North Second St.  
Machesney Park, IL 61115  
Tel. (815) 968-7557  
Fax. (815) 968-0363

**Southeast**  
15111 Dispense Ln.  
Brooksville, FL 34604  
Tel. (352) 799-6331  
Fax. (352) 796-2429

**Northeast**  
4601 Saucon Creek Rd.  
Center Valley, PA 18034  
Tel. (610) 625-4464  
Fax. (610) 625-4466